

EMC TEST REPORT
for
Shenzhen Jeway Technology Co., Ltd.

Cable

Model No.: JCA-0061, JCA-0060, JCA-0063, JCA-0160,
JCA-0170, JCA-0190, JCA-0091, JCA-0020, JCA-0050, JCA-7401

Prepared for : Shenzhen Jeway Technology Co., Ltd.
Address : Jeway Technology Park, Xueziwei Industrial Zone, Shajin,
Bao'an Area, Shenzhen
Tel: 0755-29761496
Fax: 0755-29761496
Prepared by : Anbotek Compliance Laboratory Limited
Address : 1/F, 1/Building, SEC Industrial Park, No.4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : 201211754E
Date of Test : Nov. 16~21, 2012
Date of Report : Nov. 21, 2012

TABLE OF CONTENT


| Description | Page |
|---|-----------|
| Test Report Verification | |
| 1. GENERAL INFORMATION | 5 |
| 1.1. Description of Device (EUT)..... | 5 |
| 1.2. Description of Test Facility | 6 |
| 1.3. Measurement Uncertainty | 6 |
| 1.4. Test Summary | 7 |
| 2. POWER LINE CONDUCTED EMISSION TEST..... | 8 |
| 2.1. Block Diagram of Test Setup | 8 |
| 2.2. Measuring Standard | 8 |
| 2.3. Power Line Conducted Emission Limits | 8 |
| 2.4. EUT Configuration on Measurement | 8 |
| 2.5. Operating Condition of EUT | 9 |
| 2.6. Test Procedure | 9 |
| 2.7. Test Equipment..... | 9 |
| 2.8. Measuring Results | 9 |
| 3. RADIATED EMISSION TEST | 12 |
| 3.1. Block Diagram of Test..... | 12 |
| 3.2. Measuring Standard | 12 |
| 3.3. Radiated Emission Limits..... | 12 |
| 3.4. EUT Configuration on Test | 13 |
| 3.5. Operating Condition of EUT | 13 |
| 3.6. Test Procedure | 13 |
| 3.7. Test Equipment..... | 13 |
| 3.8. Measuring Results | 13 |
| 4. ELECTROSTATIC DISCHARGE IMMUNITY TEST | 16 |
| 4.1. Block Diagram of Test Setup | 16 |
| 4.2. Measuring Standard | 16 |
| 4.3. Severity Levels and Performance Criterion..... | 16 |
| 4.4. EUT Configuration | 16 |
| 4.5. Operating Condition of EUT | 17 |
| 4.6. Test Procedure | 17 |
| 4.7. Test Equipment..... | 17 |
| 4.8. Measuring Results | 17 |
| 5. RF FIELD STRENGTH SUSCEPTIBILITY TEST | 19 |
| 5.1. Block Diagram of Test..... | 19 |
| 5.2. Measuring Standard | 19 |
| 5.3. Severity Levels and Performance Criterion..... | 19 |
| 5.4. EUT Configuration on Test | 20 |
| 5.5. Operating Condition of EUT | 20 |
| 5.6. Test Procedure | 20 |
| 5.7. Test Equipment..... | 20 |
| 5.8. Measuring Results | 20 |
| 6. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST | 22 |
| 6.1. Block Diagram of Test Setup | 22 |
| 6.2. Measuring Standard | 22 |
| 6.3. Severity Levels and Performance Criterion..... | 22 |
| 6.4. EUT Configuration | 23 |

| | |
|---|-----------|
| 6.5. Operating Condition of EUT | 23 |
| 6.6. Test Procedure | 23 |
| 6.7. Measuring Results | 23 |
| 7. PHOTOGRAPHS | 25 |
| 7.1. Photo of Power Line Conducted Emission Test | 25 |
| 7.2. Photo of Radiated Emission Test..... | 25 |
| 7.3. Photo of Electrostatic Discharge Test..... | 26 |
| 7.4 Photo of RF Field Strength susceptibility Test..... | 26 |
| 7.5. Photo of Electrical Fast Transient/Burst Immunity Test | 27 |

APPENDIX I (Photos of the EUT) (2 Pages)

APPENDIX II (CE Label) (1 Page)

TEST REPORT VERIFICATION

Applicant : Shenzhen Jeway Technology Co., Ltd.
 Manufacturer : Shenzhen Jeway Technology Co., Ltd.
 EUT : Cable
 Model No. : JCA-0061, JCA-0060, JCA-0063, JCA-0160, JCA-0170,
 JCA-0190, JCA-0091, JCA-0020, JCA-0050, JCA-7401
 Rating : DC 5V
 Trade Mark : 

Measurement Procedure Used:

EN 55022: 2010;

EN 55024: 2010;

(IEC 61000-4-2: 2008; IEC 61000-4-3: 2006+A1: 2007+A2: 2010)

The device described above is tested by Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 55022 and EN 55024 requirements. The Project in IEC 61000-4-3 was tested in Shenshen EMTEK Co., Ltd.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited.

Date of Test :

Nov. 16~21, 2012

Barak Ban

Prepared by :

(Engineer/ Barak Ban)

Amy Ding

Reviewer :

(Project Manager/ Amy Ding)

Approved & Authorized Signer :

Tom. Chen

(Manager/ Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

| | |
|-------------------|---|
| EUT | : Cable |
| Model Number | : JCA-0061, JCA-0060, JCA-0063, JCA-0160, JCA-0170, JCA-0190, JCA-0091, JCA-0020, JCA-0050, JCA-7401 (Note: All samples are the same except the model number & Shape of appliances, so we prepare “JCA-0061” for EMC test only.) |
| Test Power Supply | : DC 5V via USB Port |
| Applicant | : Shenzhen Jeway Technology Co., Ltd. |
| Address | : Jeway Technology Park,Xueziwei Industrial Zone, Shajin, Bao'an Area, Shenzhen |
| Manufacturer | : Shenzhen Jeway Technology Co., Ltd. |
| Address | : Jeway Technology Park,Xueziwei Industrial Zone, Shajin, Bao'an Area, Shenzhen |
| PC | : Manufacturer: DELL M/N: OPTIPLEX 380 S/N: 1J63X2X CE , FCC: DOC |
| MONITOR | : Manufacturer: DELL M/N: E170Sc S/N: CN-00V539-64180-055-0UPS CE , FCC: DOC |
| KEYBOARD | : Manufacturer: DELL M/N: SK-8115 S/N: CN-0DJ313-71616-06C-02XN CE , FCC: DOC Cable: 1m, unshielded |
| MOUSE | : Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC Cable: 1m, unshielded |
| Date of Receipt | : Nov. 16, 2012 |
| Date of Test | : Nov. 16~21, 2012 |

1.2. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010.

IC-Registration No.: 8058A-1

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, August 30, 2010.

CNAS - LAB Code: L3503

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

Test Location

All Emissions tests were performed
Anbotek Compliance Laboratory Limited. at 1/F, 1/Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.3. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

1.4. Test Summary

For the EUT described above. The standards used were EN 55022 for Emissions & EN 55024 for Immunity.

Table 1 : Tests Carried Out Under EN 55022: 2010

| Standard | Test Items | Status |
|----------------|--|--------|
| EN 55022: 2010 | Power Line Conducted Emission Test (150KHz To 30MHz) | √ |
| EN 55022: 2010 | Radiated Emission Test (30MHz To 1000MHz) | √ |

Table 2 : Tests Carried Out Under EN 55024: 2010


| Standard | Test Items | Status |
|----------------|---|--------|
| EN 55024: 2010 | Electrostatic Discharge immunity Test | √ |
| EN 55024: 2010 | RF Field Strength susceptibility Test | √ |
| EN 55024: 2010 | Electrical Fast Transient/Burst Immunity Test | √ |
| EN 55024: 2010 | Surge Immunity Test | x |
| EN 55024: 2010 | Injected Currents Susceptibility Test | x |
| EN 55024: 2010 | Magnetic Field Susceptibility Test | x |
| EN 55024: 2010 | Voltage Dips and Interruptions Test | x |

√ Indicates that the test is applicable

x Indicates that the test is not applicable

2. POWER LINE CONDUCTED EMISSION TEST

2.1. Block Diagram of Test Setup

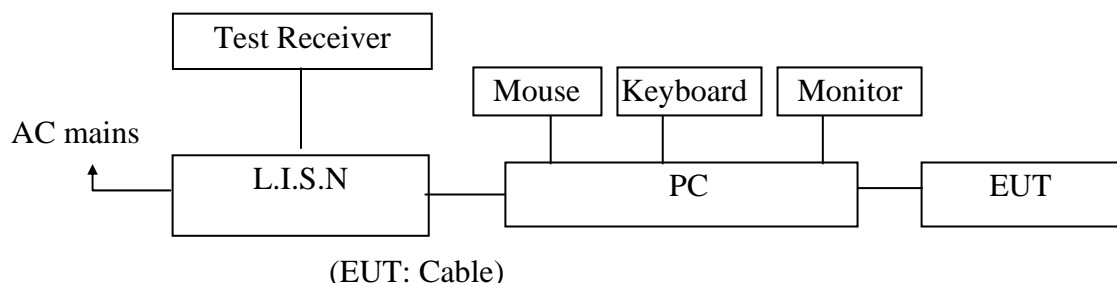

2.2. Measuring Standard

EN 55022: 2010

2.3. Power Line Conducted Emission Limits

| Frequency (MHz) | Limit (dB μ V) | |
|---|--------------------|---------------|
| | Quasi-peak Level | Average Level |
| 0.15 ~ 0.50 | 66.0 ~ 56.0 * | 56.0 ~ 46.0 * |
| 0.50 ~ 5.00 | 56.0 | 46.0 |
| 5.00 ~ 30.00 | 60.0 | 50.0 |
| NOTE1-The lower limit shall apply at the transition frequencies. NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz. | | |

2.4. EUT Configuration on Measurement

The following equipments are installed on Conducted Emission Measurement to meet EN 55022 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1. Cable

Model Number : JCA-0061
 Serial Number : N/A
 Applicant : Shenzhen Jeway Technology Co., Ltd.

2.5. Operating Condition of EUT

2.5.1. Setup the EUT as shown on Section 2.1.

2.5.2. Turn on the power of all equipments.

2.5.3. Let the EUT work in measuring mode (Communication) and measure it.

2.6. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN 55022 regulations during conducted emission measurement.

The bandwidth of the test receiver (ESCI) is set at 9KHz in 150KHz~30MHz.

The frequency range from 150KHz to 30MHz is investigated for AC mains.

The test results are listed in Section 2.8.

2.7. Test Equipment

The following test equipments are used during the power line conducted measurement:

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------------|----------------------|-----------|------------|---------------|---------------|
| 1. | EMI Receiver | Rohde & Schwarz | ESCI | 100627 | Nov. 12, 2011 | 1 Year |
| 2. | LISN | SchwarzBeck | NSLK 8126 | 8126377 | May 19, 2012 | 1 Year |
| 3. | RF Switching Unit | Compliance Direction | RSU-M2 | 38303 | May 19, 2012 | 1 Year |
| 4. | EMI Test Software ES-K1 | Rohde & Schwarz | N/A | N/A | N/A | N/A |

2.8. Measuring Results

PASS.

The frequency range 150KHz to 30MHz is investigated


The test curves are shown in the following pages.

CONDUCTED EMISSION TEST DATA

EUT: Cable M/N: JCA-0061
 Operating Condition: Communication
 Test Site: 1# Shielded Room
 Operator: Barak Ban
 Test Specification: DC 5V via USB Port
 Comment: N
 Tem: 22.2°C Hum: 60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K~30M Disturbance Voltages

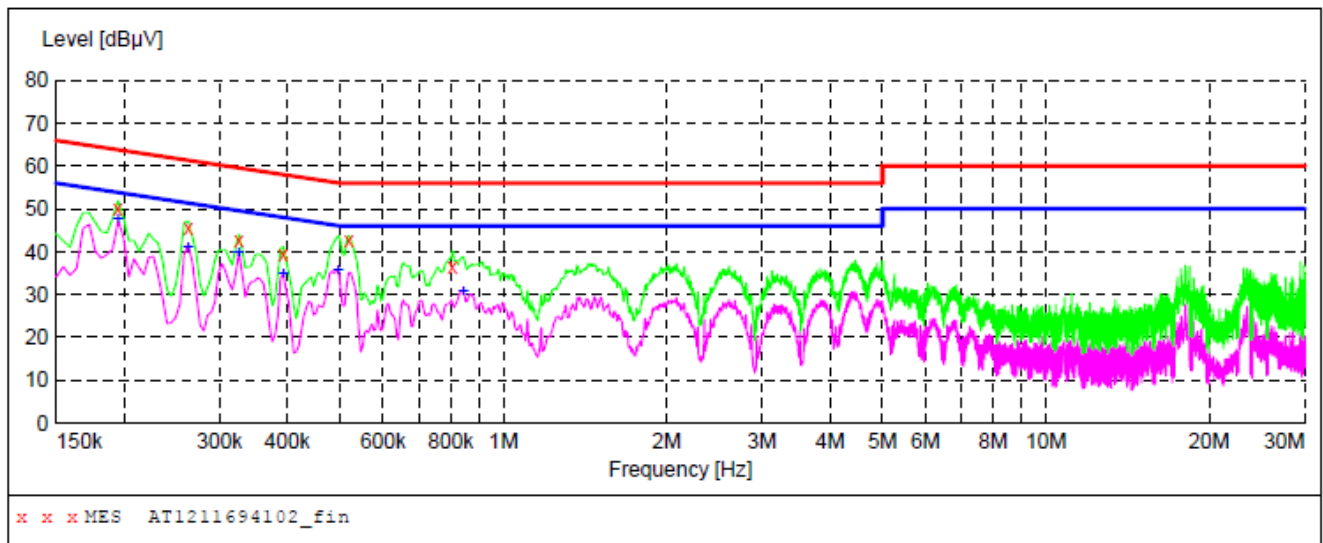**MEASUREMENT RESULT: "AT1211694102_fin"**

11/19/2012 10:00AM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.195000 | 49.90 | 20.1 | 64 | 13.9 | QP | N | GND |
| 0.262500 | 45.50 | 20.1 | 61 | 15.9 | QP | N | GND |
| 0.325500 | 42.60 | 20.1 | 60 | 17.0 | QP | N | GND |
| 0.393000 | 39.50 | 20.1 | 58 | 18.5 | QP | N | GND |
| 0.519000 | 42.60 | 20.1 | 56 | 13.4 | QP | N | GND |
| 0.807000 | 36.60 | 20.1 | 56 | 19.4 | QP | N | GND |

MEASUREMENT RESULT: "AT1211694102_fin2"

11/19/2012 10:00AM


| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.195000 | 47.40 | 20.1 | 54 | 6.4 | AV | N | GND |
| 0.262500 | 41.10 | 20.1 | 51 | 10.3 | AV | N | GND |
| 0.325500 | 39.80 | 20.1 | 50 | 9.8 | AV | N | GND |
| 0.393000 | 34.80 | 20.1 | 48 | 13.2 | AV | N | GND |
| 0.496500 | 35.50 | 20.1 | 46 | 10.6 | AV | N | GND |
| 0.843000 | 30.90 | 20.1 | 46 | 15.1 | AV | N | GND |

CONDUCTED EMISSION TEST DATA

EUT: Cable M/N: JCA-0061
 Operating Condition: Communication
 Test Site: 1# Shielded Room
 Operator: Barak Ban
 Test Specification: DC 5V via USB Port
 Comment: L
 Tem: 22.2°C Hum: 60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K~30M Disturbance Voltages

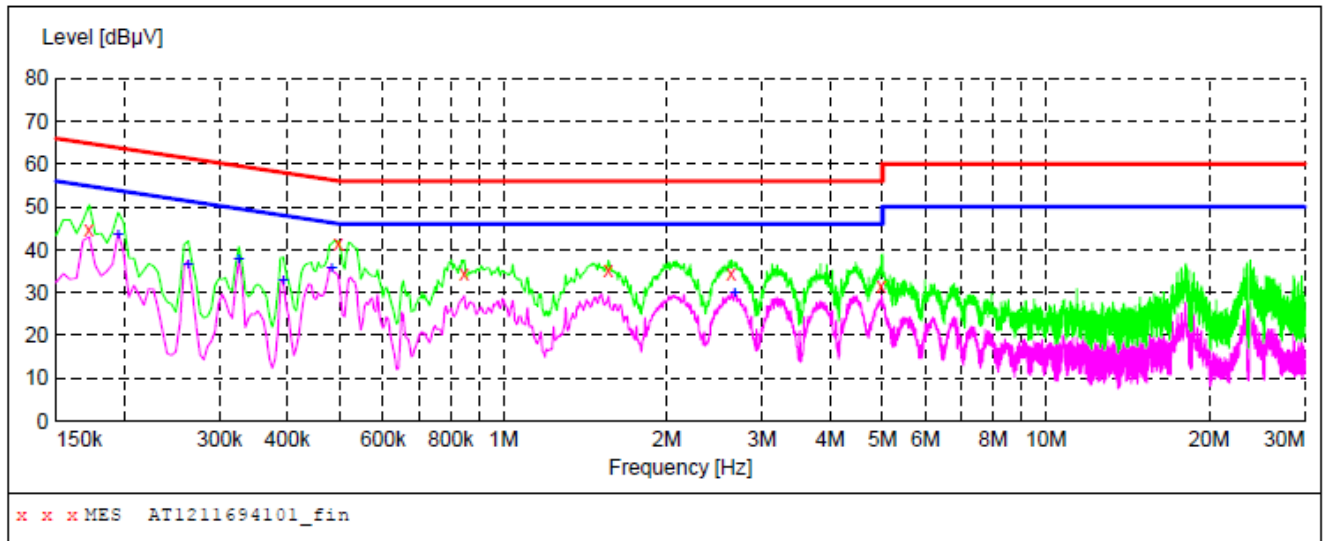**MEASUREMENT RESULT: "AT1211694101_fin"**

11/19/2012 9:57AM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.172500 | 44.80 | 20.1 | 65 | 20.0 | QP | L1 | GND |
| 0.496500 | 41.30 | 20.1 | 56 | 14.8 | QP | L1 | GND |
| 0.847500 | 34.60 | 20.1 | 56 | 21.4 | QP | L1 | GND |
| 1.562500 | 35.40 | 20.3 | 56 | 20.6 | QP | L1 | GND |
| 2.633500 | 34.30 | 20.4 | 56 | 21.7 | QP | L1 | GND |
| 4.973500 | 31.50 | 20.5 | 56 | 24.5 | QP | L1 | GND |

MEASUREMENT RESULT: "AT1211694101_fin2"


11/19/2012 9:57AM

| Frequency MHz | Level dBμV | Transd dB | Limit dBμV | Margin dB | Detector | Line | PE |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.195000 | 43.60 | 20.1 | 54 | 10.2 | AV | L1 | GND |
| 0.262500 | 36.50 | 20.1 | 51 | 14.9 | AV | L1 | GND |
| 0.325500 | 37.90 | 20.1 | 50 | 11.7 | AV | L1 | GND |
| 0.393000 | 32.80 | 20.1 | 48 | 15.2 | AV | L1 | GND |
| 0.483000 | 35.70 | 20.1 | 46 | 10.6 | AV | L1 | GND |
| 2.669500 | 30.00 | 20.4 | 46 | 16.0 | AV | L1 | GND |


3. RADIATED EMISSION TEST

3.1. Block Diagram of Test

3.1.1. Block diagram of connection between the EUT and simulators

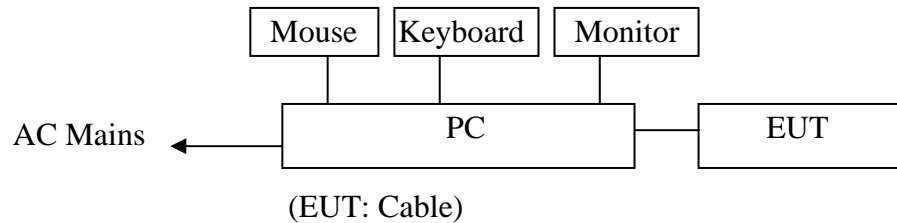

3.1.2. Block diagram of test setup (In chamber)

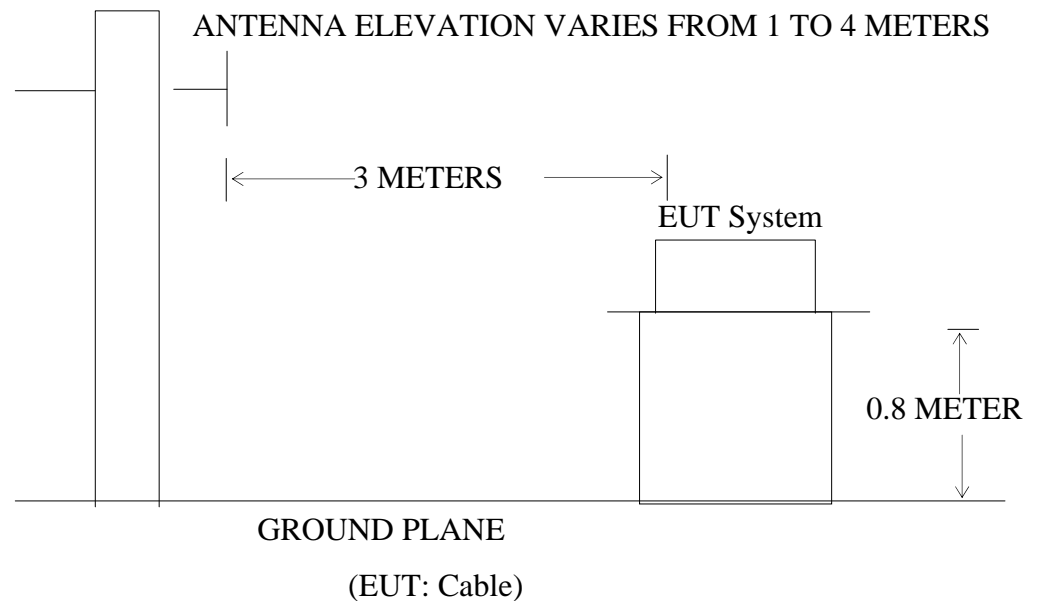

3.2. Measuring Standard

EN 55022: 2010

3.3. Radiated Emission Limits

3.3.1. EN 55022: 2010

Radiated Emission Limits

All emanations from an EN 55022 device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

| FREQUENCY (MHz) | DISTANCE (Meters) | FIELD STRENGTHS LIMIT (dB μ V/m) |
|--------------------|----------------------|---|
| 30 ~ 230 | 3 | 40 |

| | | |
|------------|---|----|
| 230 ~ 1000 | 3 | 47 |
|------------|---|----|

- Note:
- (1) The smaller limit shall apply at the combination point between two frequency bands.
 - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

3.4. EUT Configuration on Test

The EN 55022 regulations test method must be used to find the maximum emission during radiated emission measurement.

3.5. Operating Condition of EUT

3.5.1. Turn on the power.

3.5.2. Let the EUT work in test mode (Communication) and measure it.

3.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCI) is set at 120kHz.

The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 3.8.

3.7. Test Equipment

The following test equipments are used during the radiated emission measurement:

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|--------------------------|----------------------|-----------|---------------|---------------|---------------|
| 1. | EMI Test Receiver | Rohde & Schwarz | ESCI | 100627 | Nov. 12, 2011 | 1 Year |
| 2. | Trilog Broadband Antenna | Schwarzbeck | VULB9163 | VULB 9163-289 | May 17, 2012 | 1 Year |
| 3. | Pre-amplifier | Compliance Direction | PAP-0203 | 22008 | May 19, 2012 | 1 Year |
| 4. | EMI Test Software EZ-EMC | SHURPLE | N/A | N/A | N/A | N/A |

3.8. Measuring Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.


The test curves are shown in the following pages.


Anbotek Compliance Laboratory Limited

1/F, 1/Building, SEC Industrial Park, No.4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26066544
Fax: (86)755-26014772
Http://www.anbotek.com

| | | | |
|----------------------------|--------------------------------|----------------------|---------------------------|
| Job No.: | AT1211694E | Polarization: | Vertical |
| Standard: | (RE)EN 55022_class B_3m | Power Source: | DC 5V via USB Port |
| Test item: | Radiation Test | Date: | 2012/11/19 |
| Temp.(C)/Hum.(%RH): | 24.3(C)/55%RH | Time: | 17:59:43 |
| EUT: | Cable | Test By: | Barak Ban |
| Model: | JCA-0061 | Distance: | 3m |
| Note: | Communication | | |

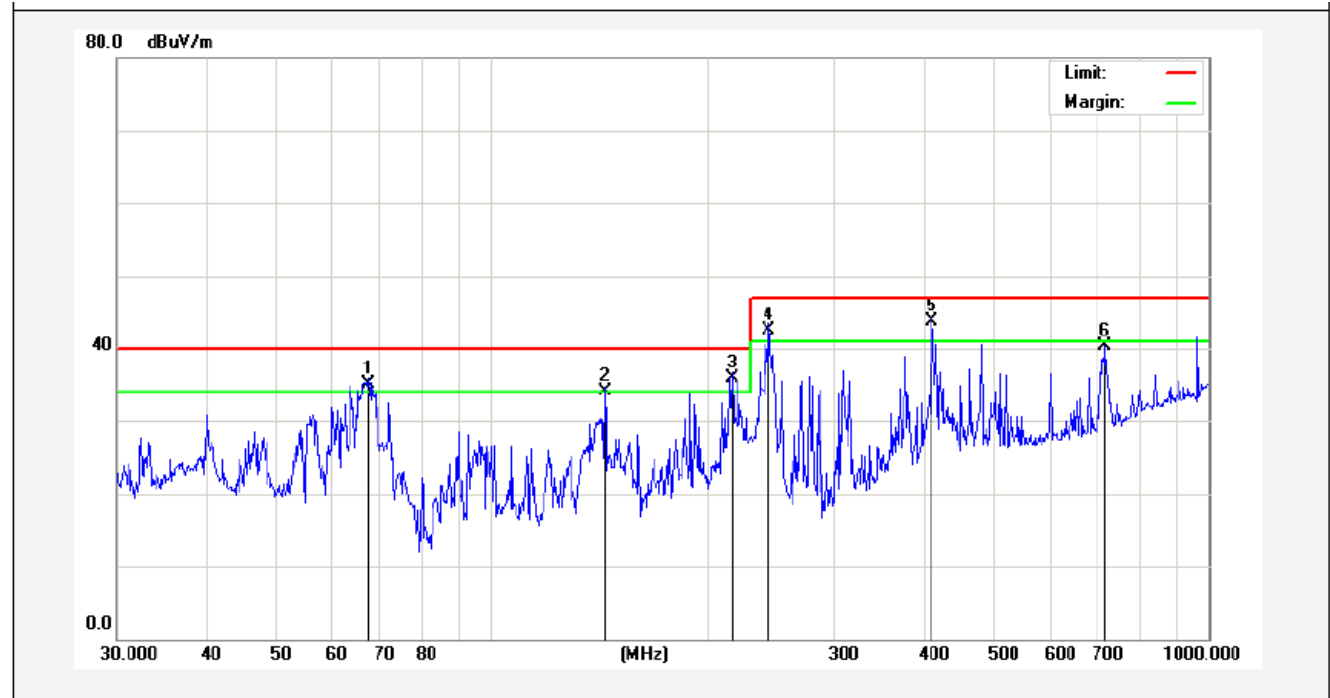


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1 | 67.2022 | 53.54 | -18.42 | 35.12 | 40.00 | -4.88 | QP | 100 | 0 | |
| 2 | 143.8294 | 52.50 | -18.43 | 34.07 | 40.00 | -5.93 | QP | 100 | 360 | |
| 3 | 216.0240 | 51.27 | -15.27 | 36.00 | 40.00 | -4.00 | QP | 100 | 0 | |
| 4 | 243.3771 | 56.57 | -14.07 | 42.50 | 47.00 | -4.50 | QP | 100 | 360 | |
| 5 | 410.3824 | 55.37 | -11.57 | 43.80 | 47.00 | -3.20 | QP | 100 | 0 | |
| 6 | 716.6820 | 48.20 | -7.97 | 40.23 | 47.00 | -6.77 | peak | | | |



Anbotek Compliance Laboratory Limite
 1/F, 1/Building, SEC Industrial Park, No.4 Qianhai Road,
 Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26066544
 Fax: (86)755-26014772
 Http://www.anbotek.com

| | | | |
|----------------------------|--------------------------------|----------------------|---------------------------|
| Job No.: | AT1211694E | Polarziation: | Horizontal |
| Standard: | (RE)EN 55022_class B_3m | Power Source: | DC 5V via USB Port |
| Test item: | Radiation Test | Date: | 2012/11/19 |
| Temp.(C)/Hum.(%RH): | 24.3(C)/55%RH | Time: | 18:06:53 |
| EUT: | Cable | Test By: | Barak Ban |
| Model: | JCA-0061 | Distance: | 3m |
| Note: | Communication | | |

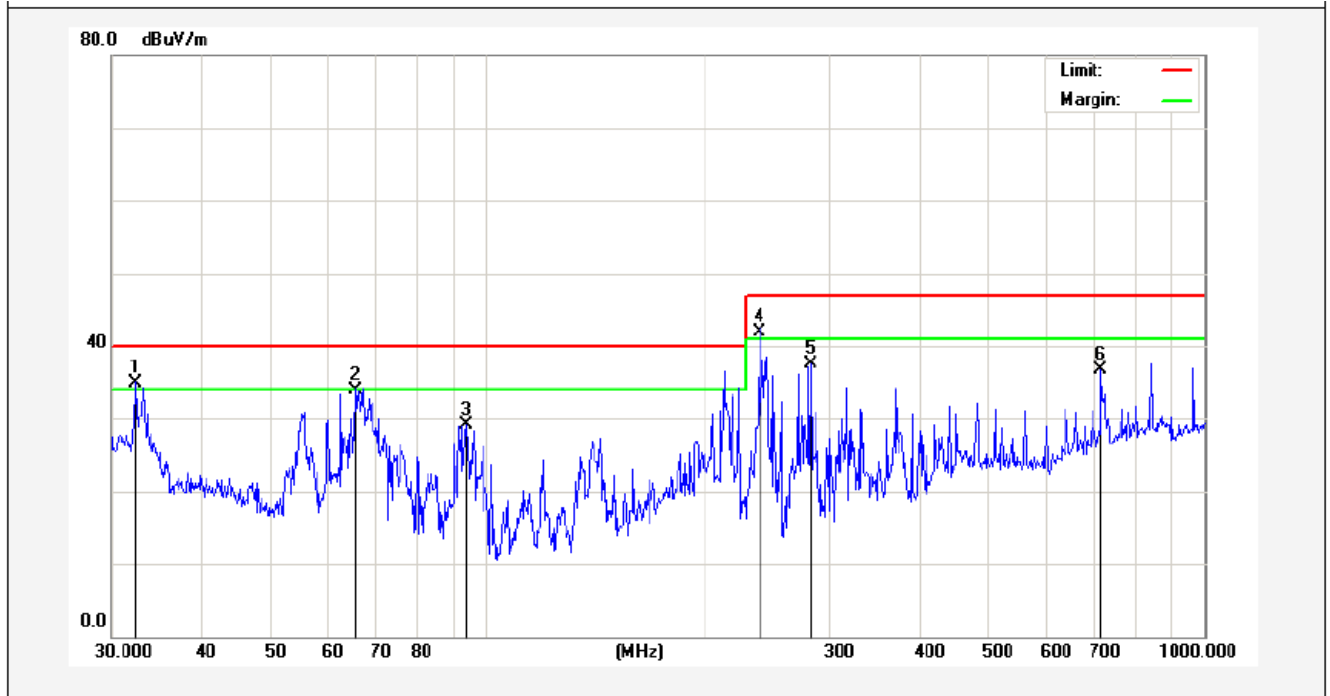

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/) | Over Limit (dB) | Detector | Height (cm) | degree (deg) | Remark |
|-----|-------------|------------------|---------------|-----------------|---------------|-----------------|----------|-------------|--------------|--------|
| 1 | 32.4059 | 50.54 | -15.67 | 34.87 | 40.00 | -5.13 | QP | 300 | 0 | |
| 2 | 65.5726 | 51.56 | -17.72 | 33.84 | 40.00 | -6.16 | QP | 300 | 360 | |
| 3 | 93.4402 | 50.63 | -21.60 | 29.03 | 40.00 | -10.97 | peak | | | |
| 4 | 239.1473 | 60.17 | -18.17 | 42.00 | 47.00 | -5.00 | QP | 300 | 0 | |
| 5 | 281.9945 | 55.68 | -18.17 | 37.51 | 47.00 | -9.49 | peak | | | |
| 6 | 716.6820 | 44.85 | -8.14 | 36.71 | 47.00 | -10.29 | peak | | | |

4.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5 except the test set up replaced by Section 4.1.

4.6. Test Procedure

4.6.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 100 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

4.6.2. Contact Discharge:

All the procedure shall be same as Section 4.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

4.6.3. Indirect discharge for horizontal coupling plane

At least 50 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

4.6.4. Indirect discharge for vertical coupling plane

At least 50 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

4.7. Test Equipment

The following test equipments are used during the electrostatic discharge immunity measurement:

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|----------------|--------------|-----------|------------|--------------|---------------|
| 1. | ESD Simulators | KIKUSUI | KES4021 | LJ003477 | May 25, 2012 | 1 Year |

4.8. Measuring Results

PASS

Please refer to the following page

Electrostatic Discharge Test Results


Anbotek Compliance Laboratory Limited

| Applicant | : Shenzhen Jeway Technology Co., Ltd. | Test Date | : Nov. 20, 2012 |
|--------------------|---------------------------------------|---|-----------------|
| EUT | : Cable | Temperature | : 25°C |
| M/N | : JCA-0061 | Humidity | : 54% |
| Air discharge | : $\pm 8.0\text{kV}$ | Criterion | : B |
| Contact discharge: | $\pm 4.0\text{kV}$ | Test Engineer: | Barak Ban |
| Test Mode | : Communication | | |
| Location | | Kind A-Air Discharge C-Contact Discharge | Result |
| Slot of the EUT | 8 points | A | PASS |
| Others | 6 points | A | PASS |
| HCP | 4 points | C | PASS |
| VCP of front | 4 points | C | PASS |
| VCP of rear | 4 points | C | PASS |
| VCP of left | 4 points | C | PASS |
| VCP of right | 4 points | C | PASS |
| | | | |
| | | | |
| Note: | | | |


5. RF FIELD STRENGTH SUSCEPTIBILITY TEST

5.1. Block Diagram of Test

5.1.1. Block diagram of connection between the EUT and simulators

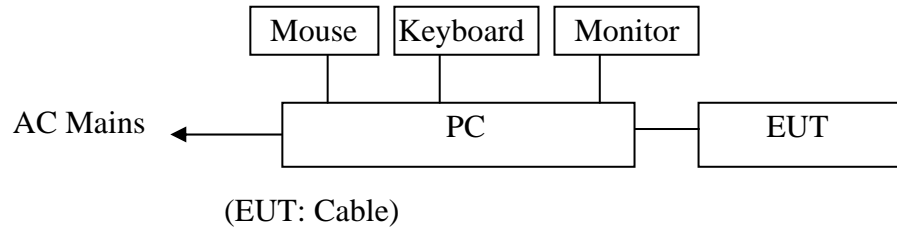

5.1.2. Block diagram of RS test setup

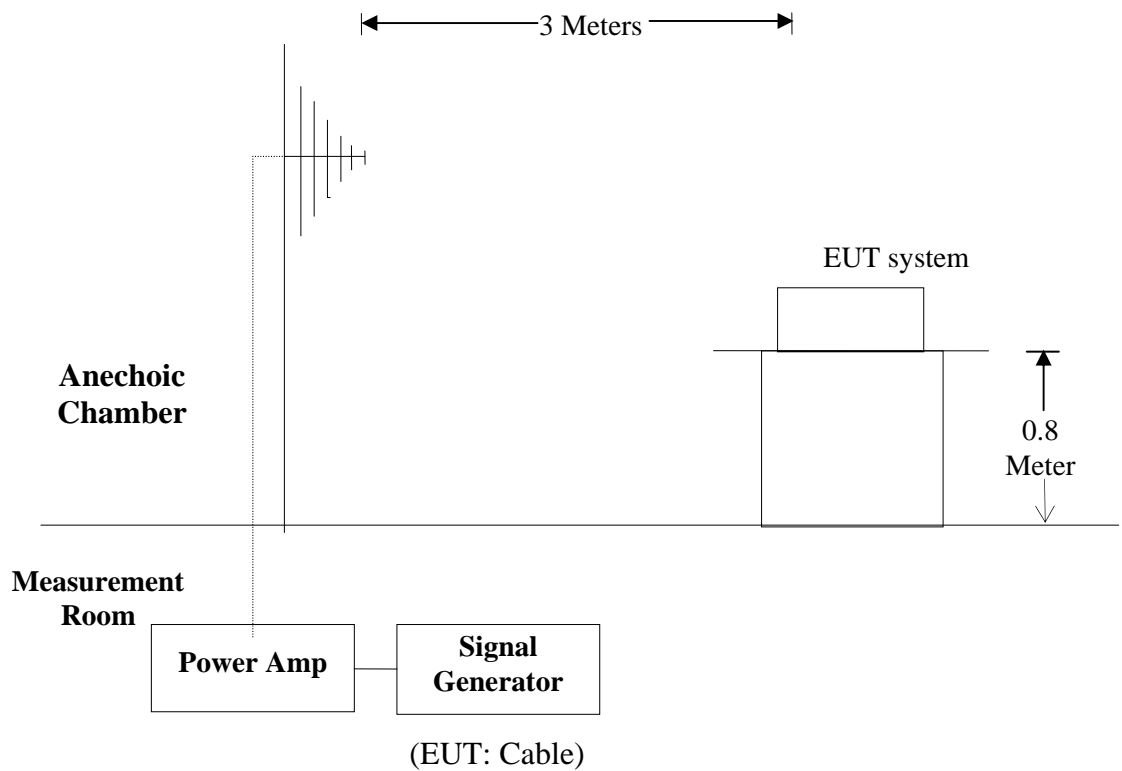

5.2. Measuring Standard

EN 55024: 2010

IEC 61000-4-3: 2006+A1: 2007+A2: 2010

Severity Level: 2, 3V / m

5.3. Severity Levels and Performance Criterion

5.3.1. Severity Levels

| Level | Field Strength V/m |
|-------|--------------------|
| 1. | 1 |
| 2. | 3 |
| 3. | 10 |

| | |
|---|---------|
| X | Special |
|---|---------|

5.3.2. Performance Criterion: A

5.4. EUT Configuration on Test

The configuration of the EUT is same as Section 2.4.

5.5. Operating Condition of EUT

Same as conducted emission measurement which is listed in Section 2.5. except the test setup replaced as Section 5.1.

5.6. Test Procedure

The EUT are placed on a table which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera is used to monitor its screen. All the scanning conditions are as following:

| Condition of Test | Remark |
|---------------------------|-------------------------|
| ----- | ----- |
| 1. Fielded Strength | 3V/m (Severity Level 2) |
| 2. Radiated Signal | Unmodulated |
| 3. Scanning Frequency | 80-1000MHz |
| 4. Sweep time of radiated | 0.0015 Decade/s |
| 5. Dwell Time | 1 Sec. |

5.7. Test Equipment

The following test equipments are used during the RF Field Strength susceptibility measurement:

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|------------------------------|--------------|--------------|-------------|--------------|---------------|
| 1. | RF Power Meter. Dual Channel | BOONTON | 4232A | 10539 | May 29, 2012 | 1 year |
| 2. | 50ohm Diode Power Sensor | BOONTON | 51011EMC | 34236/34238 | May 29, 2012 | 1 year |
| 3. | Broad-Band Horn Antenna | SCHWARZBECK | BBHA9120 L3F | 332 | May 29, 2012 | 1 year |
| 4. | Power Amplifier | PRANA | AP32MT215 | N/A | May 29, 2012 | 1 year |
| 5. | Power Amplifier | MILMEGA | AS0102-55 | N/A | May 29, 2012 | 1 year |
| 6. | Signal Generator | AEROFLEX | 2023B | N/A | May 29, 2012 | 1 year |
| 7. | Field Strength Meter | HOLADAY | HI-6005 | N/A | May 29, 2012 | 1 year |
| 8. | RS232 Fiber Optic Modem | HOLADAY | HI-4413P | N/A | May 29, 2012 | 1 year |
| 9. | Log.-Per. Antenna | SCHWARZBECK | VULP 9118E | N/A | May 29, 2012 | 1 year |

5.8. Measuring Results

PASS.

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Anbotek Compliance Laboratory Limited

| | |
|---|---------------------------|
| Applicant : Shenzhen Jeway Technology Co., Ltd. | Test Date : Nov. 20, 2012 |
| EUT : Cable | Temperature : 25°C |
| M/N : JCA-0061 | Humidity : 54% |
| Field Strength : 3 V/m | Criterion : A |
| Test Mode : Communication | Test Engineer : Barak Ban |
| Frequency Range: 80 MHz to 1000 MHz | |

| | | | |
|-------------|-------------------------------|--------------------------------|---|
| Modulation: | <input type="checkbox"/> None | <input type="checkbox"/> Pulse | <input checked="" type="checkbox"/> AM 1KHz 80% |
|-------------|-------------------------------|--------------------------------|---|

| | | | | | | |
|-------|----------------------------------|---|-------------------|------------|---|----------|
| | Frequency Rang 1: 80~ 1000MHz | | Frequency Rang 2: | | | |
| Steps | # | / | % | # | / | % |
| | Horizontal | | Vertical | Horizontal | | Vertical |
| Front | PASS | | PASS | | | |
| Right | PASS | | PASS | | | |
| Rear | PASS | | PASS | | | |
| Left | PASS | | PASS | | | |


Test Equipment :

Note: Tested by EMTEK.


6. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

6.1. Block Diagram of Test Setup

6.1.1. Block diagram of connection between the EUT and simulators

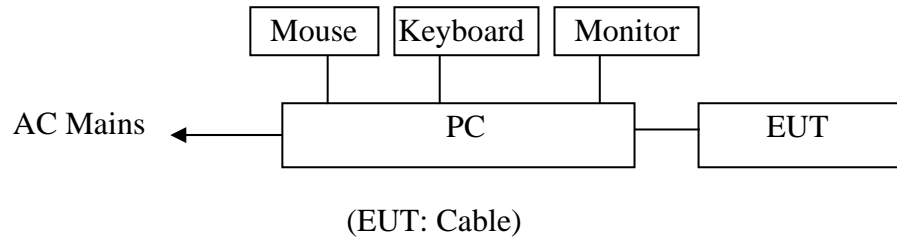

6.1.2. EFT Test Setup

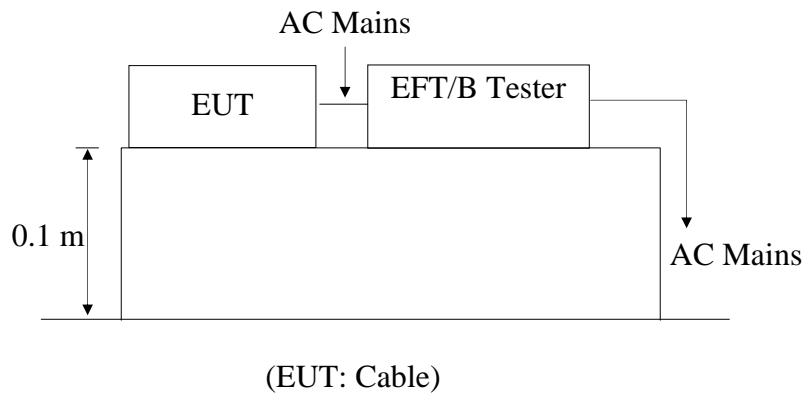

6.2. Measuring Standard

EN 55024: 2010

IEC 61000-4-4: 2011

Severity Level, Level 2: 0.5kV

6.3. Severity Levels and Performance Criterion

6.3.1. Severity level

| Open Circuit Output Test Voltage $\pm 10\%$ | | |
|---|-----------------------|---|
| Level | On Power supply Lines | On I/O (Input/Output) Signal data and control lines |
| 1. | 0.5 kV | 0.25 kV |
| 2. | 1 kV | 0.5 kV |
| 3. | 2 kV | 1 kV |
| 4. | 4 kV | 2 kV |
| X | Special | Special |

6.3.2. Performance criterion: **B**

6.4. EUT Configuration

The configuration of EUT are listed in Section 2.4.

6.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5, except the test set up replaced by Section 6.1.

6.6. Test Procedure

The EUT is put on the table which is 0.1 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

6.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

6.6.2. For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

6.6.3. For DC output line ports:

It's unnecessary to test.

6.7. Measuring Results

PASS.

Please refer to the following page.

Electrical Fast Transient/Burst Test Results

Anbotek Compliance Laboratory Limited

| | | | |
|--|-----------------------|--------------------------|-----------|
| Applicant : <u>Shenzhen Jeway Technology Co., Ltd.</u> | | | |
| EUT : <u>Cable</u> | | M/N : <u>JCA-0061</u> | |
| Power Supply: <u>AC 230V, 50Hz</u> | | criterion: B | |
| Ambient Condition : <u>24°C</u> | | <u>55% RH</u> | |
| Operation Mode: Communication | | Test Data: Nov. 20, 2012 | |
| Inject Line : AC Mains | Inject Method: Direct | Inject Time(s): 120 | |
| Line | Test Voltage | Result(+) | Result(-) |
| L | | | |
| N | | | |
| PE | | | |
| L 、 N | | | |
| L 、 PE | | | |
| N 、 PE | | | |
| L 、 N 、 PE | | | |
| Signal Line | 0.5kV | PASS | PASS |
| DC Line | | | |
| Note : | | | |
| Remark: | | | |

7. PHOTOGRAPHS

7.1. Photo of Power Line Conducted Emission Test



7.2. Photo of Radiated Emission Test



7.3. Photo of Electrostatic Discharge Test



7.4 Photo of RF Field Strength susceptibility Test



7.5. Photo of Electrical Fast Transient/Burst Immunity Test



APPENDIX I

(Photos of EUT)

Figure 1
The EUT- Outside View



Figure 2
Part Of The EUT View


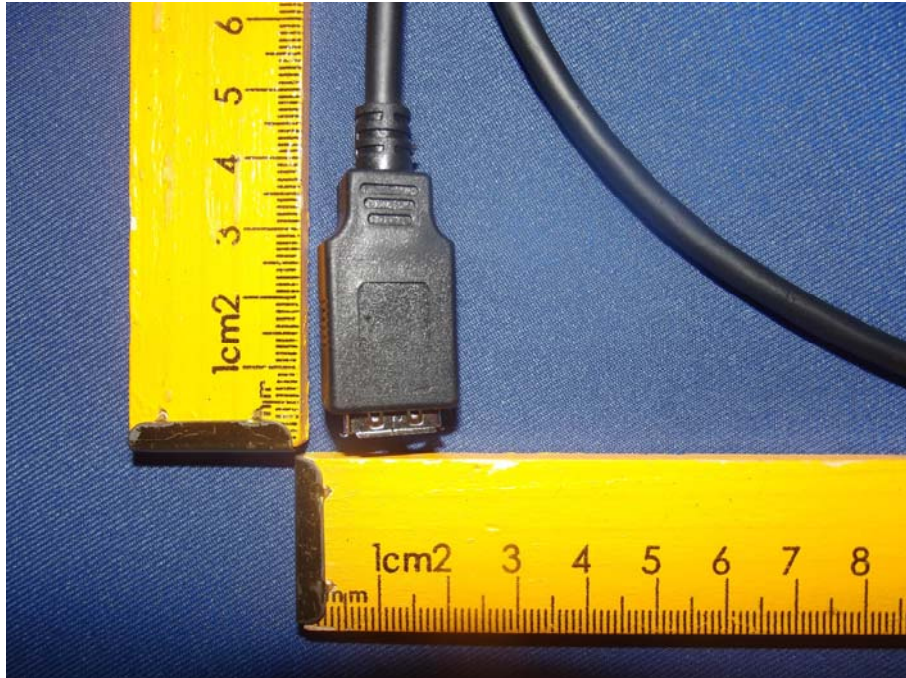


Figure 3
Part Of The EUT View

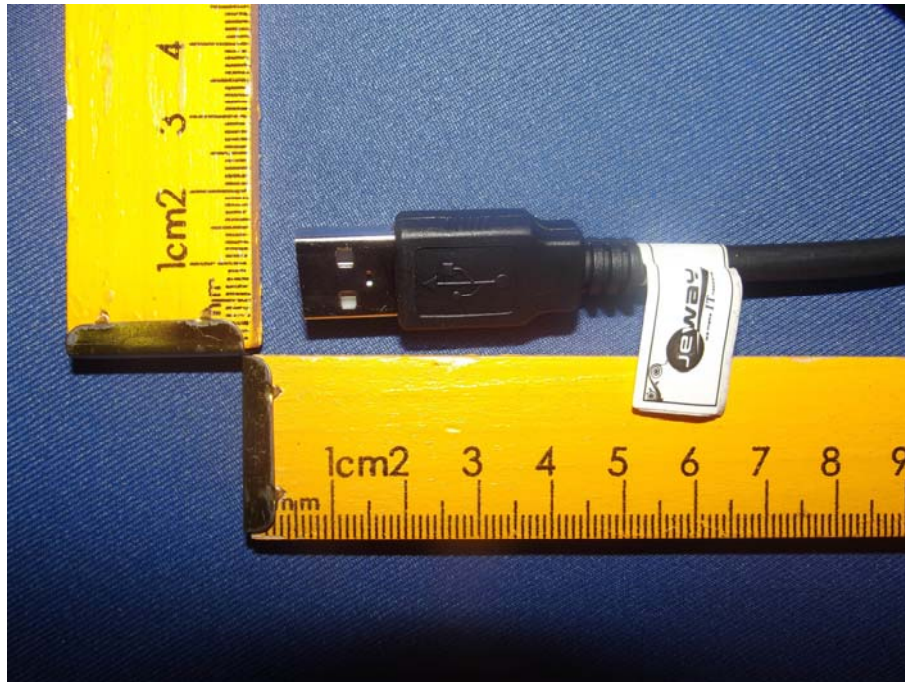

APPENDIX II (CE Label)

CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:
If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.
2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.
3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.
4. The CE marking must be affixed visibly, legibly and indelibly.
It must have the same height as the initials 'CE'

Proposed Label Location on EUT

EUT Outside View/proposed CE Mark Location

